


baucoplus Access Panel

ACCESS PANEL SOLUTIONS INC.

toll-free 1-877-592-0033

www.accesspanelsolutions.com

Standard Single Door

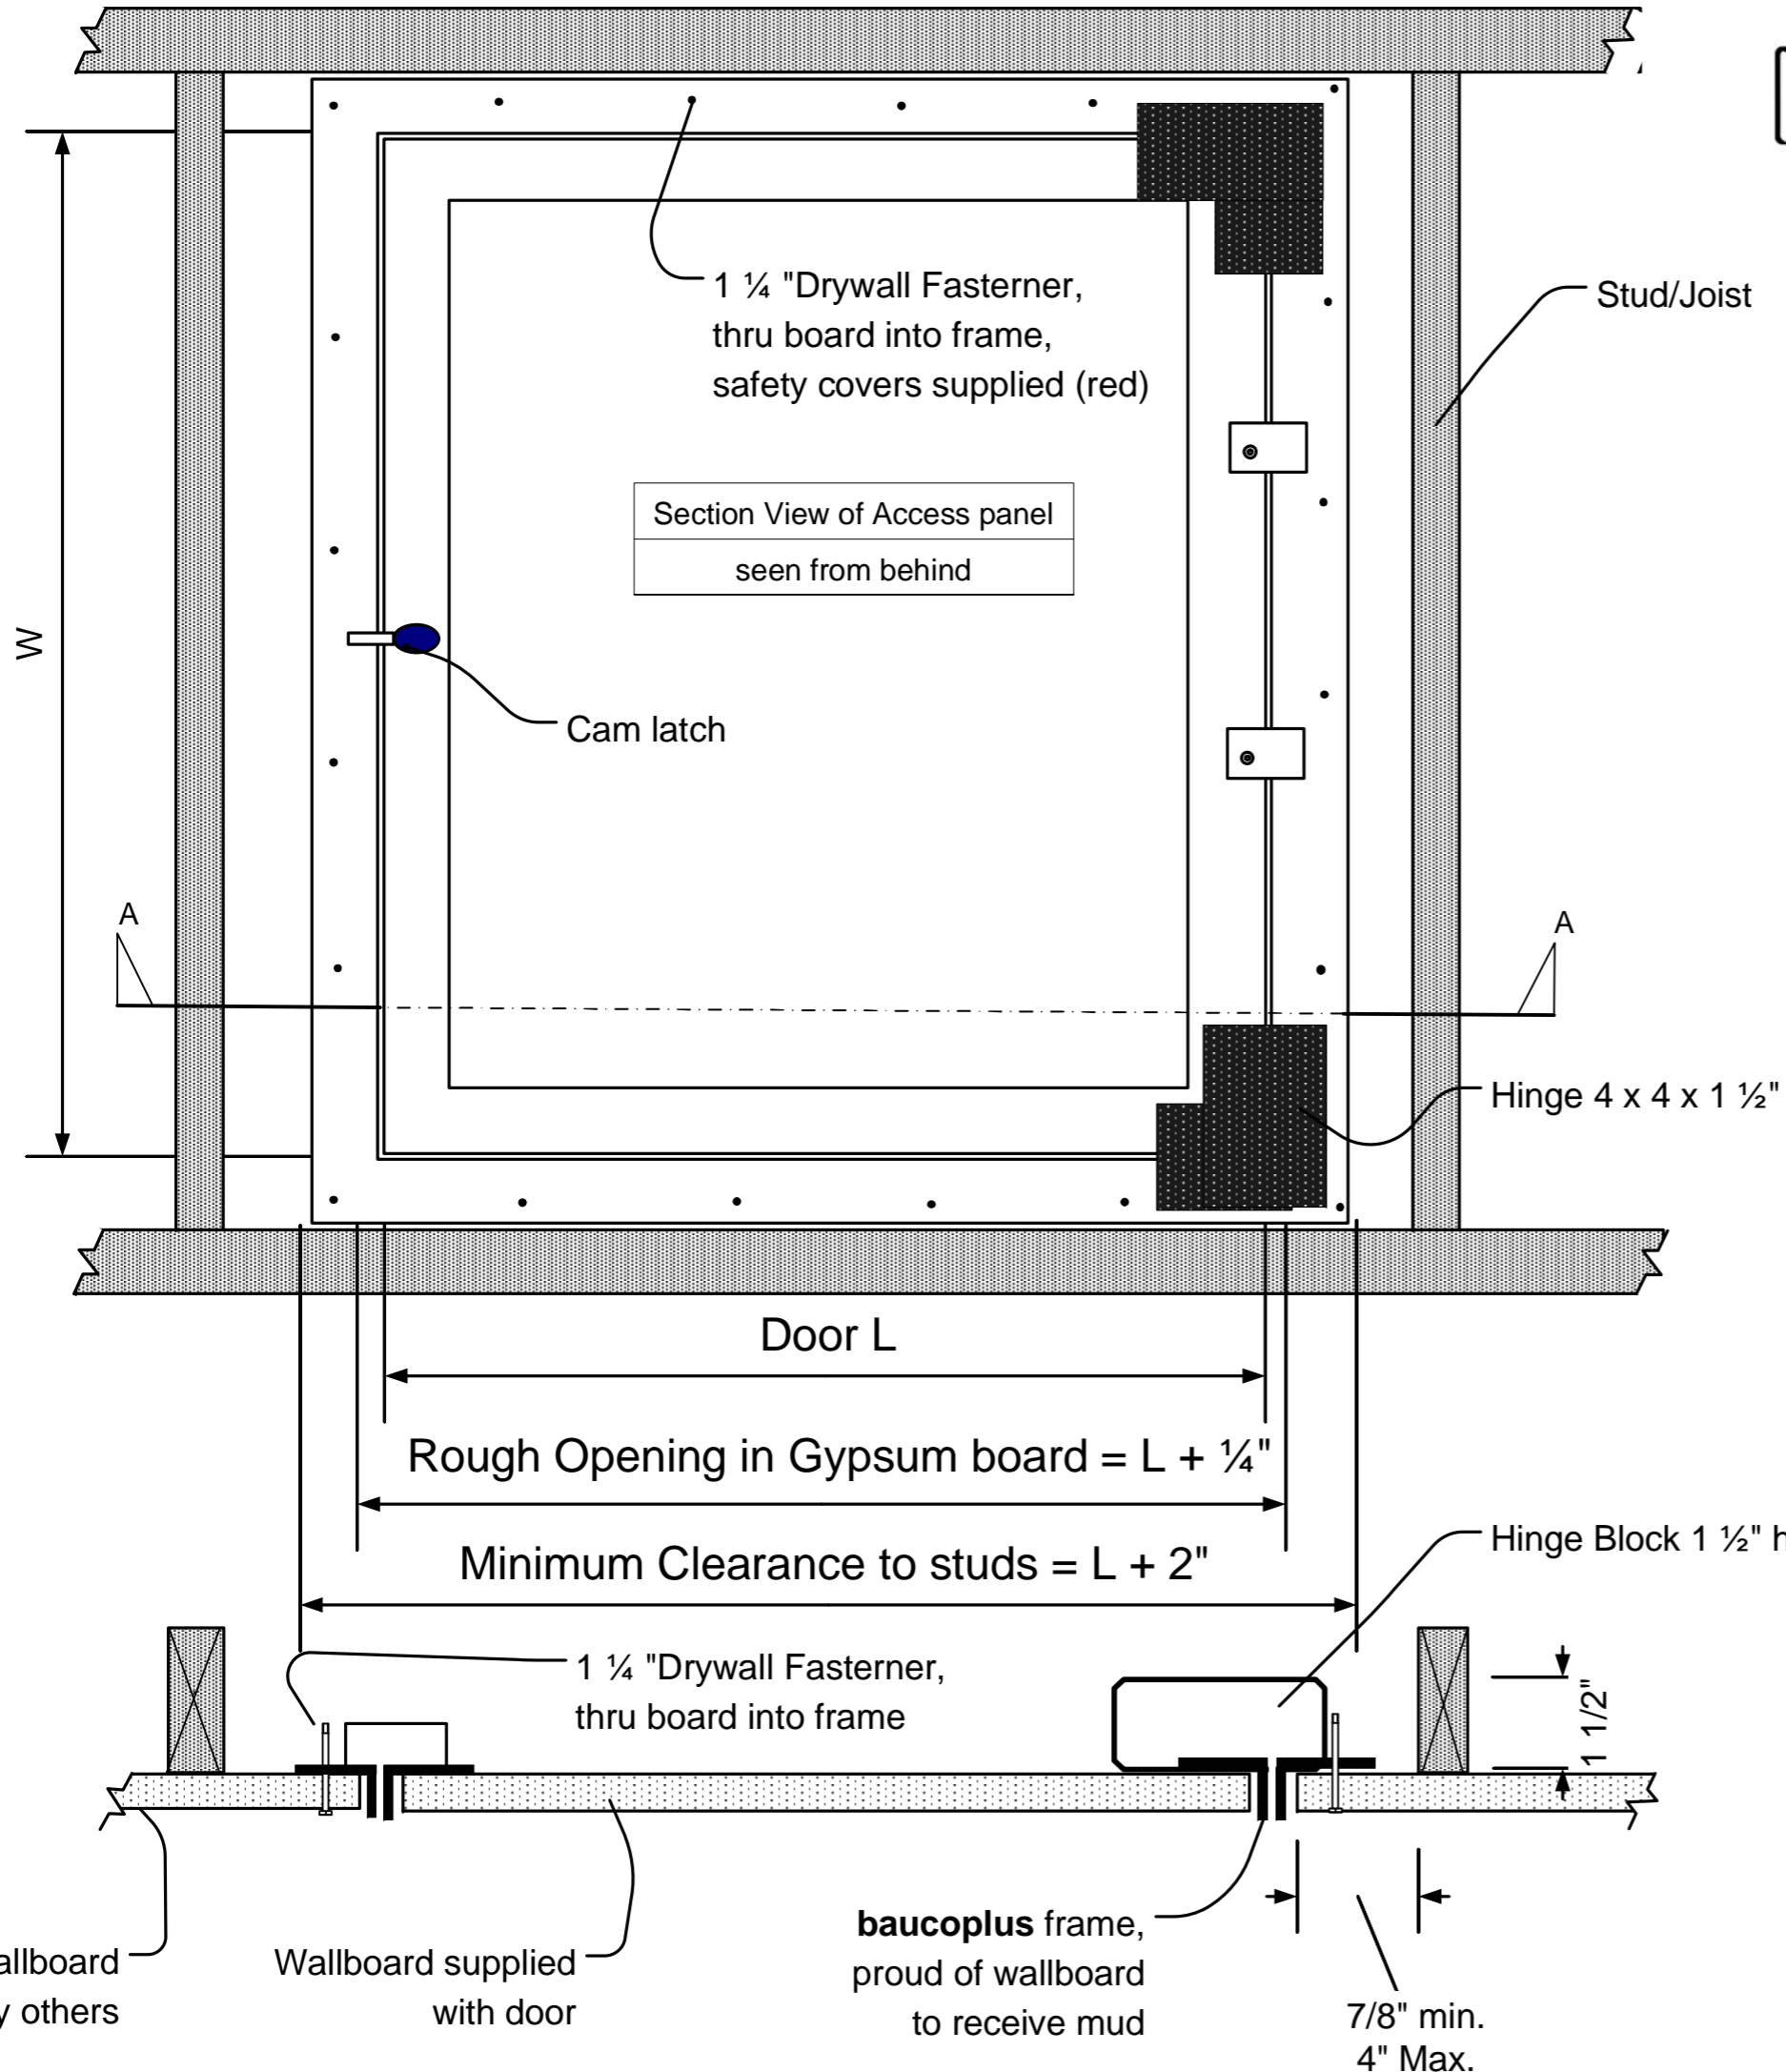

Gypsum Board: _____ (5/8" or ½")

Panel Width (W): _____ **Panel Length (L):** _____

Latch: screw driver operated cam-latch _____
tamper resistant cam-latch _____
keyed lock _____ concealed touch-latch _____

Door: Aluminum extrusion, non-corrosive hardware, safety catches, installation aides, & bracing.

Frame: Recessed aluminum extrusion provides edge to bead against to which surrounding surface can be finished.

Hinge: Unique patented concealed non-corroding 2-point pin hinge, allows door to open to 120°, & can be removed for full access.

Finish: Frame mill finish. Gypsum board ready to be finished matching surrounding wall or ceiling surface.

Gasket: Self-adhesive draft seal enclosed.

Framing: Frame the rough opening to width + min 2" and length + min of 2".

Board to access panel size less ¼", leaving a minimum edge of 7/8" surrounding the rough opening, e.g. door 10 x 10, joist opening 12 x 12", board opening 10.25 x 10.25"

Installation: Pass baucoplus door with frame thru opening and lay aluminum frame onto wallboard edge around opening. Place fasteners thru board into aluminum frame. Frame serves as bead.

Comments: